
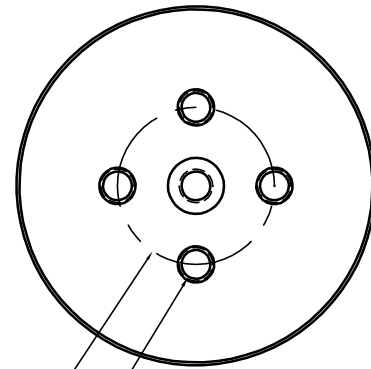


NOTES (UNLESS SPECIFIED):

1. ALL DIMENSIONS IN INCHES
2. DO NOT EXCEED RECOMMENDED LOADING SPECIFICATIONS
3. DO NOT CUT, DRILL OR MODIFY ANY PORTION OF THIS BEARING
4. REFER TO MANUAL FOR MOUNTING LOCATION REQUIREMENTS

#	DESCRIPTION	DATE	APPROVED
AD	ECO 905-11247	02/15/2007	GWB

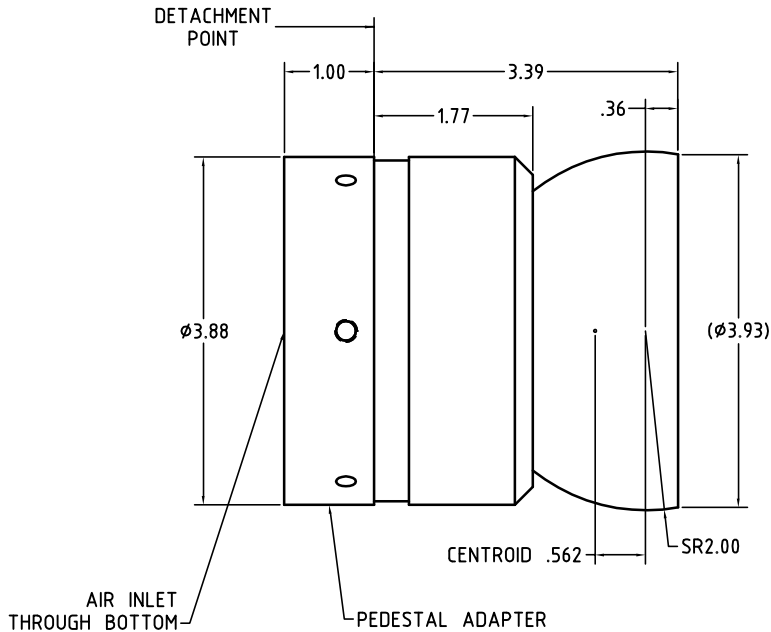

PROPERTIES OF SPHERE

RADIUS OF GYRATION ABOUT CENTROIDAL AXES

X-X 1.306 INCH

Y-Y 1.089 INCH

Z-Z 1.089 INCH

MOMENTS OF INERTIA ABOUT CENTROIDAL AXES


LX 3.465 lbm-in²

LY 2.409 lbm-in²

LZ 2.409 lbm-in²

MASS

2.03 lbm

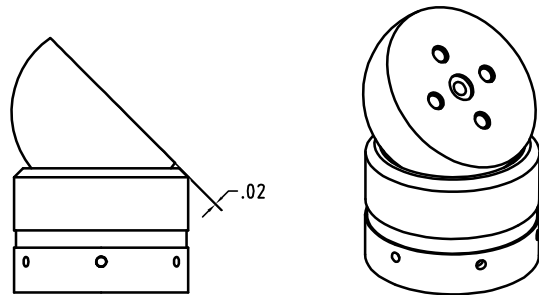

MATERIAL	ALUMINUM		NAME	DATE	
DRAWN	GWB	CHECKED	JH	4/23/2006	
APPROVED					
FINISH					CAGE CODE 1TV41
PART NUMBER					TITLE ASSY, SRA200-R45
TOLERANCES UNLESS OTHERWISE SPECIFIED	.XX ± .XX ± .XX ±	.XX ± .XX ± .XX ±	ANGLE 30°	UNITS INCHES	THIS DRAWING, INCLUDING ALL SUBJECT MATTER ENCLOSES CONFIDENTIAL INFORMATION OF SPECIALTY COMPONENTS, INC. AND IS LOANED WITH THE UNDERSTANDING THAT IT SHALL BE RETURNED. IT WILL NOT BE USED FOR ANY PURPOSE EXCEPT THAT FOR WHICH LOANED UNLESS WRITTEN PERMISSION IS GRANTED BY THE OWNER. ANY DUPLICATION OF THIS DOCUMENT IS STRICTLY PROHIBITED. © specialty components, inc.
SCALE	DRAWING NUMBER		REV		
	C 620-39130		AA		
	NUMBER OF SHEETS				